

JLG SERIES

JLG SERIES Crane Scale



OPTIONS

- * Remote Control
- * Heat Insulation Board
- * AC-01N handheld RF weighing indicator with RS232 interface, can expand to connect PC, dot matrix printer and label printer



Remote Control



AC-01N



Heat Insulation Board


JADEVER
MORE THAN WEIGHING



Features

- 1.2" super big and bright red LED display with wide view angle;
- Load cell is a body takes shape, safe is reliable;
- Has buckles heavily, safe is reliable;
- High impact aluminum casting outer covering and appendix;
- over load safety up 200%;
- In sets exempts the maintenance rechargeable battery, one charge can be lastload safting 100 hours;
- Two section of types feelings quantity cut, the precision is higher;
- optional remote

Dimension

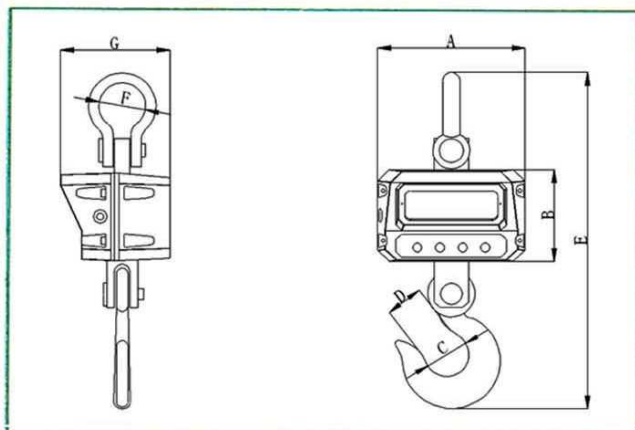

Specification

Model	JLG-600	JLG-1T	JLG-2T	JLG-3T	JLG-5T	JLG-7.5T	JLG-10T
Capacity	0.6t	1t	2t	3t	5t	7.5t	10t
Resolution	0.2/0.1kg.	0.5/0.2kg.	1/0.5kg.	1/0.5kg.	2/1kg	5/2kg.	5/2kg.

	A	B	C	D	E	F	G
JLG-0.6T	250	165	50	50	575	87	194
JLG-1T	250	165	50	50	575	87	194
JLG-2T	250	165	50	50	575	87	194
JLG-3T	250	165	50	50	575	87	194
JLG-5T	250	165	60	63	615	89	194
JLG-10T	250	165	75	100	740	100	204
JLG-15T	250	165	82	100	940	137	214
JLG-20T	250	165	90	127	940	137	214

OPTION

AC-01N :
Handheld RF weighing indicator :

Main features :

Battery built in or AA x 5 pcs. (not included)
LCD Display 0.5" With Backlight
RS232 interface
Keyboard function : on/off, Hold, Tare, Zero

Specification :

Working rate : 427MHz-440MHz
Wireless transmitter distance : 100 Meter and no direction limited
Power : 12DC 1A
Rs232 : format is 2400,c,7,1



JADEVER[®]

Jadever Scale Co., Ltd.

No.5, Wu-Chuan 2Rd., Wu-Ku Hsiang, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2299-0203 Fax: 886-2-2299-0204

http://www.jadever.com.tw E-mail: jadever@jadever.com.tw

Jadever Weightech, Inc.

275 Calvert Road, Markham, Ontario, Canada L6C 1V1

Tel: 1-905-887-4688 Fax: 1-905-887-4066

E-mail: jadever@mail.com

Distributed by